


PRODUKTDATENBLATT

<nbs/>

DALleco Control | Steuergeräte für Lichtmanagementsysteme

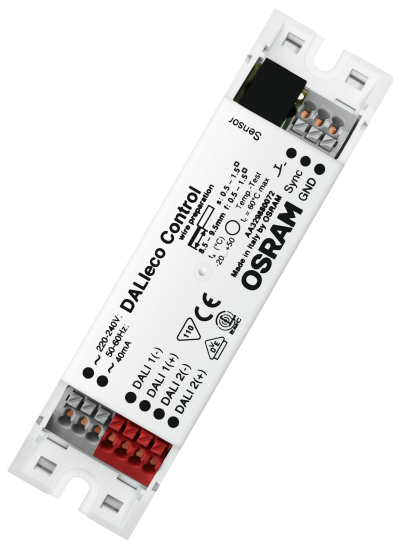

Anwendungsgebiete

- Offices
- Classrooms
- Training rooms
- Corridors
- Ceiling or independent installation via ECO CI KIT possible

Produktvorteile

- VDE/VDE EMC certified system
- Simplified startup thanks to predefined operation modes
- Automatic and manual setting of regulation set point

Produkteigenschaften

- 2 channel light control with DALI interface
- Daylight-dependent regulation and presence-dependent control of light
- 100 hours burn-in function for fluorescent lamps
- Operation via standard pushbutton or IR remote control
- Outputs with adjustable offset
- Outputs with electronical reversible overtemperature, short-circuit, overload protection
- Connection of up to 4 DALleco LS/PD LI or 6 DALI LS/PD LI sensors
- Connection of up to 4 light and presence sensors via 4p4c plug system
- Individual adjustment of functional parameters via IR remote control
- Halogen free polycarbonate plastic housing
- Sensor connection via polarity reversal protected 4p4c socket (RJ10)

TECHNISCHE DATEN

Elektrische Daten

Nennleistung	4,00 W
Nennspannung	230 V
Netzfrequenz	50...60 Hz

Maße & Gewicht

Länge	118.00 mm
Lochmaßabstand Länge	110,0 mm
Breite	30.00 mm
Breite (einschließlich runde Leuchten)	30.00 mm
Höhe	21.00 mm
Länge (einschließlich runde Leuchten)	21.00 mm
Produktgewicht	48,5 g

Temperaturen & Betriebsbedingungen

Umgebungstemperaturbereich	-20...+50 °C
----------------------------	--------------

Einsatzmöglichkeiten

Dimmbar	Nein
DIM-Schnittstelle	DALI
Anzahl der Steuerausgänge	2

Zertifikate & Standards

Schutzklasse	II
Schutzart	IP20

Daten gemäß der Verordnung zur Energieverbrauchskennzeichnung EU 2019/2015

Ähnliche Farbtemperatur	RANGE
-------------------------	-------

TECHNISCHE AUSSTATTUNG

- Suitable for up to 32 electronic control gears











DOWNLOADS

DOWNLOADS



User instruction
350950_DALleco Quickstartguide (GB)

DOWNLOADS

	User instruction 507082_Operating instructions DALleco control_ NORDIC
	User instruction 507081_Operating instructions DALleco control_WEU
	User instruction 507083_Operating instructions DALleco control_EEU
	PRODUKTDATENBLATT 341826_DALleco Control datasheet (GB)
	Certificates EAEC N RU D-DE.MYu62.B.02241 20 17.09.2020-16.09.2025
	Declarations of conformity 341817_CE_declaration_DALlecosystem
	Declarations of conformity EU Declaration of Conformity 2019_9C1_2874588_EN_09
	CAD data 3-dim 341824_CAD Data DALleco
	CAD data 3-dim 341825_CAD Data DALleco
	Advertisements DALleco: Multi-functional light management system (DE)

VERPACKUNGSMITTEL

EAN	Verpackungseinheit (Stück pro Einheit)	Abmessungen (Länge x Breite x Höhe)	Bruttogewicht	Volumen
4008321988645	Faltschachtel 1	45 mm x 45 mm x 170 mm	111.50 g	0.34 dm ³
4008321789297	Versandschachtel 25	240 mm x 238 mm x 189 mm	3194.00 g	10.80 dm ³

Die genannten Produktnummern beschreiben die kleinste bestellbare Mengeneinheit. Eine Versandeinheit kann mehrere Einzelprodukte beinhalten. Als Bestellmenge verwenden Sie bitte das Ein- oder Mehrfache einer Versandeinheit.

Haftungsausschluss

Änderungen und Irrtümer vorbehalten. Vergewissern Sie sich, dass Sie immer den neuesten Stand verwenden.